




MADE IN
ITALY



TOP SELECTION PROJECT 2024



WARM
Light

DAY
Light

COLD
Light

KELVIN SETTABLE LAMP




NOEMI

PAG 10



SILOE

PAG 10

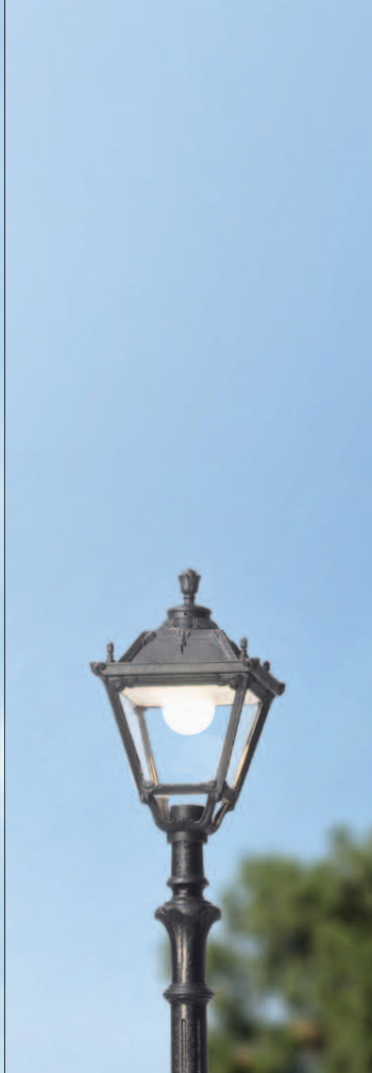

TOBIA

PAG12



SIMON

PAG12



ELIA

PAG 16



PIETRO

PAG 16



GLOBE

PAG 20



**CLASSIC
RANGE**

E27 HIGH POWER LED

CLASSIC RANGE



E27 HIGH POWER LED

SILICONE PROTECTION

DRIVER

INDOOR & OUTDOOR USE

-30 +80 °C

90% HUMIDITY

VOLTAGE SURGE RESISTANT

4000K 3620lm

3000K 3325lm

30W

100-240V

CE

CB

LVD

EMC

ERP

IECEE

CB SCHEME

for details see pag. 59

Ø100

15W
1690 lm

Ø100

30W
3620 lm

CCT SET

CCT SETTABLE

3000 K 4000 K

SDCM <6

Ø118

50W
6550 lm

Ø138

60W
7600 lm

E35.201.R20.Q1K




**NEW VERSION
HIGH POWER LED**

NEBO/OFIR
NOEMI 2L
for details see pag. 10

MADE IN ITALY


Q43.207.H1L



HOREB/ELIA
for details see pag. 16

NEBO/TOBIA
for details see pag. 12

Q33.201.Q1K



OFIR/NOEMI
for details see pag. 10



E35.132.Q1K

MADE IN ITALY

U33.113.Q1K



LOT/SIMON
for details see pag. 12

ADVANTAGES



ANTI CORROSION

NO MAINTENANCE



UV-RAYS STABILIZED

DOUBLE INSULATION




NOT AFFECTED BY
CHEMICAL FERTILIZERS

FULLY MODULAR
Ø60mm

RESIN POST OF A SINGLE PIECE WITHOUT JOINTS

Stronger, safer and more
durable

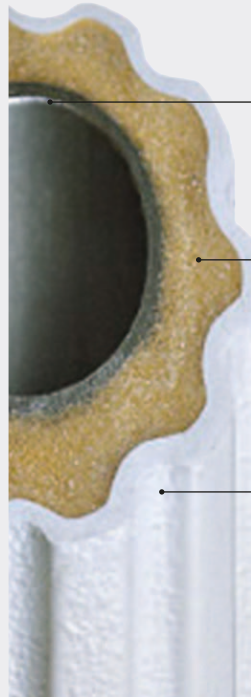


**INNER METAL
POLE STRUCTURE**
Structural metal pole
hot deep galvanized
inside and outside by
zinc bath immersion.

EXPANSE
High Density rigid
polyurethane provides
lightweight and
durable cohesion
between the inner
metal post and the
outer resin cover.


OUTER RESIN COVER
Outer coating of a single
piece without joints
made of shockproof
resin material:
- Rust and corrosion-free
- Paste molded colors, UV
stabilized
- Self-extinguishing on fire




SUGGESTED COMBINATIONS

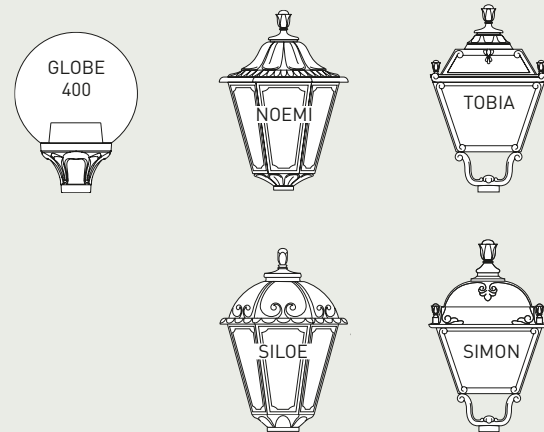


DIFFUSER





OFIR SYSTEM
2L - 3L

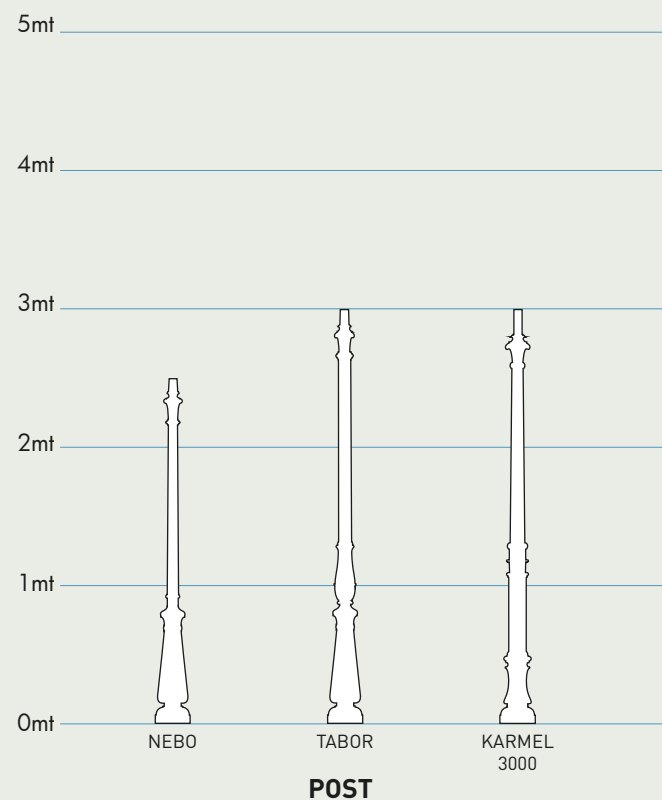


DIFFUSER

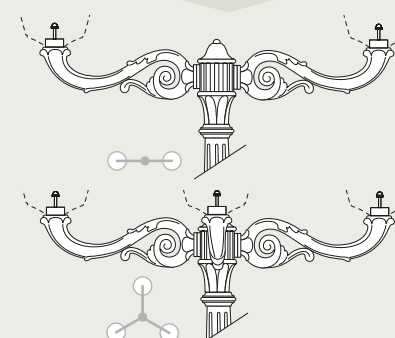


ADAM SYSTEM
2L - 3L

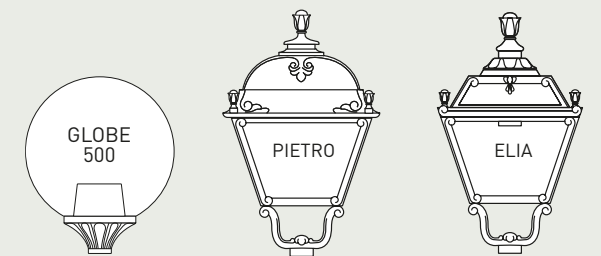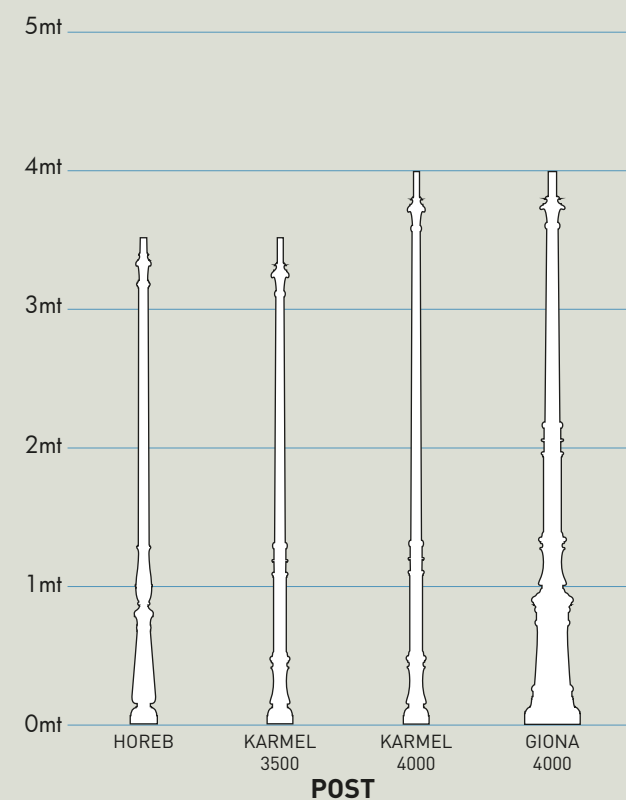

DIFFUSER

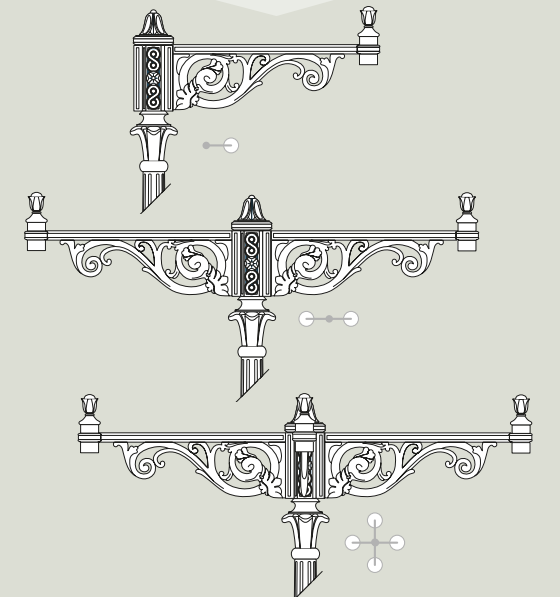

ARON SYSTEM
1L - 2L - 4L

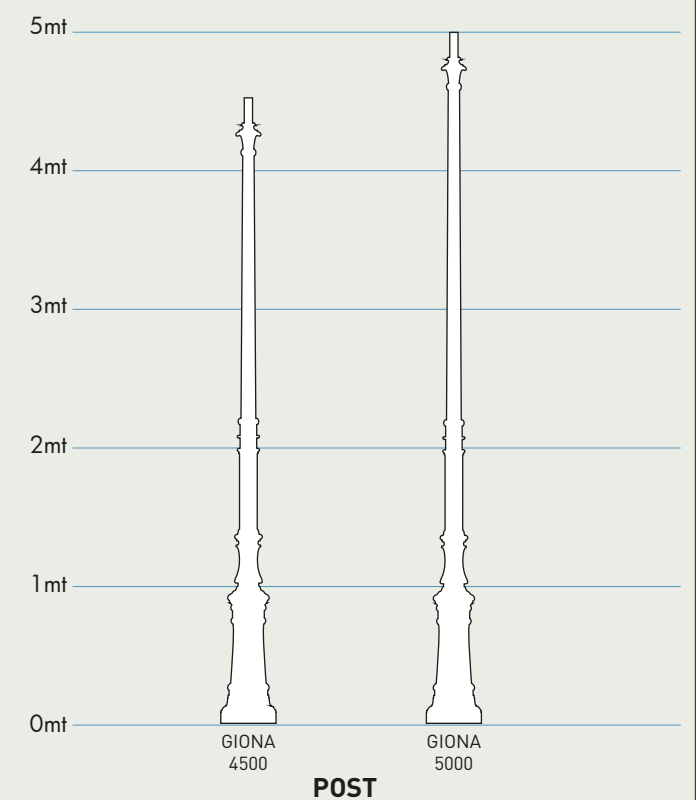

NOEMI/SILOE HIGH POWER LED
CLASSIC RANGE



MADE IN ITALY

E27 HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C

-30°

90% HUMIDITY

VOLTAGE SURGE RESISTANT

30W (3620 lm)

50W (6550 lm)

More details at page 59

E27 HIGH POWER LED VERSIONS

30W HIGH POWER LED

50W HIGH POWER LED

AVAILABLE COLORS

RESIN BODY
(MOULDED COLOURS)

DIFFUSER

BLACK (A)

WHITE (W)

CLEAR (X)

OPAL (Y)

UV TREATED

ANTI-SHOCK

RECYCLABLE

CE

CB IEC60598-1 CLASS II

IP55

DOUBLE INSULATION

NOEMI-SILOE 30W HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX UP TO	VOLTAGE RANGE	CCT SETTABLE	
 Ø 100	30W	3620 lm	100-240V 50/60 Hz	4000K/3000K 	NOEMI-SILOE = 70W

NOEMI-SILOE 50W HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX UP TO	VOLTAGE RANGE	COLOUR TEMPERATURE	
 Ø 118	50W	6550 lm	100-240V 50/60 Hz	4000K 3000K	NOEMI-SILOE = 100W

LAMP INCLUDED HIGH POWER LED E27

NOEMI

30W LED		E35.000.Q1K
50W LED	4000K 	E35.000.H1L E35.000.H1R

530
350
Ø 60


LAMP INCLUDED HIGH POWER LED E27

SILOE

30W LED		K35.000.Q1K
50W LED	4000K 	K35.000.H1L K35.000.H1R

530
350
Ø 60

TOBIA/SIMON HIGH POWER LED
CLASSIC RANGE



MADE IN ITALY

E27 HIGH POWER LED

INDOOR & OUTDOOR USE


+80°C
-30°

90% HUMIDITY

VOLTAGE SURGE RESISTANT

30W (3620 lm)
50W (6550 lm)

More details at page 59

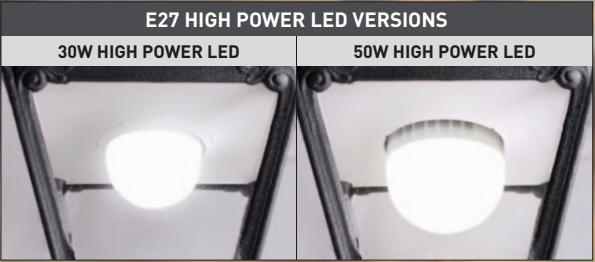

AVAILABLE COLORS

RESIN BODY (MOULDED COLOURS)	DIFFUSER
BLACK (A) WHITE (W)	CLEAR (X) OPAL (Y)



TOBIA-SIMON 30W HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX UP TO	VOLTAGE RANGE	CCT SETTABLE	
E27 HIGH POWER LED Ø 100	30W	3620 lm	100-240V 50/60 Hz	4000K/3000K CCT SET	TOBIA-SIMON = 70W HQI-SON

TOBIA-SIMON 50W HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX UP TO	VOLTAGE RANGE	COLOUR TEMPERATURE	
E27 HIGH POWER LED Ø 118	50W	6550 lm	100-240V 50/60 Hz	4000K 3000K	TOBIA-SIMON = 100W HQI-SON




30W LED	CCT SET	Q33.000.Q1K
50W LED	4000K 3000K	Q33.000.H1L Q33.000.H1R



30W LED	CCT SET	U33.000.Q1K
50W LED	4000K 3000K	U33.000.H1L U33.000.H1R

TOBIA/SIMON GX53 LED
CLASSIC RANGE



MADE IN ITALY



FLAT
DIFFUSER

GX53 LED VERSION
4x GX53

GX53 LED

CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6

AVAILABLE COLORS

RESIN BODY (MOULDED COLOURS)		DIFFUSER	
BLACK (A)	WHITE (W)	CLEAR (X)	OPAL (Y)



TOBIA-SIMON 40W GX53 LED					
LAMP	POWER	LUMINOUS FLUX (Φ TOTAL)	VOLTAGE RANGE	CCT SETTABLE	
	4x10W 40W	5160 lm	100-240V 50/60 Hz	6500K/4000K/3000K	TOBIA-SIMON 100W HQI-SON

TOBIA

LAMP INCLUDED: 4x GX53 LED

CCT SET LED GX53 LAMP INCLUDED

4x10W 40W

Q35.000.D4K

FLAT DIFFUSER FOR GX53 LED VERSION

NEW VERSION
CCT SETTABLE LAMP

SIMON

LAMP INCLUDED: 4x GX53 LED

CCT SET LED GX53 LAMP INCLUDED


4x10W 40W

U35.000.D4K

FLAT DIFFUSER FOR GX53 LED VERSION

NEW VERSION
CCT SETTABLE LAMP

ELIA/PIETRO HIGH POWER LED
CLASSIC RANGE

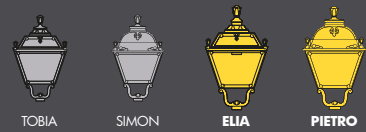

MADE IN ITALY

NEW VERSION
HIGH POWER LED

NEW HIGH POWER LED

INDOOR &
OUTDOOR
USE

+80°C
-30°
90% HUMIDITY

VOLTAGE SURGE
RESISTANT

50W (6550 lm)
60W (7600 lm)

More details at page 59



AVAILABLE COLORS			
RESIN BODY (MOULDED COLOURS)		DIFFUSER	
BLACK (A)	WHITE (W)	CLEAR (X)	OPAL (Y)



ELIA/PIETRO 50W HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX UP TO	VOLTAGE RANGE	COLOUR TEMPERATURE	
E27 HIGH POWER LED Ø 118	50W	6550 lm	100-240V 50/60 Hz	4000K 3000K	ELIA-PIETRO = 70W HQI-SON

ELIA/PIETRO 60W HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX UP TO	VOLTAGE RANGE	COLOUR TEMPERATURE	
E27 HIGH POWER LED Ø 138	60W	7600 lm	100-240V 50/60 Hz	4000K 3000K	ELIA-PIETRO = 100W HQI-SON


LAMP INCLUDED
HIGH POWER
LED E27

50W	4000K	Q43.000.H1L
	3000K	Q43.000.H1R
60W	4000K	Q43.000.W1L
	3000K	Q43.000.W1R

LAMP INCLUDED
HIGH POWER
LED E27

50W	4000K	U43.000.H1L
	3000K	U43.000.H1R
60W	4000K	U43.000.W1L
	3000K	U43.000.W1R

ELIA/PIETRO GX53 LED
CLASSIC RANGE



MADE IN ITALY



GX53 LED VERSION
8x GX53 LED

GX53 LED

CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6

AVAILABLE COLORS

RESIN BODY (MOULDED COLOURS)		DIFFUSER	
BLACK (A)	WHITE (W)	CLEAR (X)	OPAL (Y)



ELIA/PIETRO 80W GX53 LED					
LAMP	POWER	LUMINOUS FLUX (Φ TOTAL)	VOLTAGE RANGE	CCT SETTABLE	
	8x10W 80W	10320 lm	100-240V 50/60 Hz	6500K/4000K/3000K	ELIA-PIETRO HQI-SON 150W

ELIA

LAMP INCLUDED: 8x GX53 LED

LED GX53 LAMP INCLUDED

CCT SET

8x10W 80W

Q45.000.D8K

FLAT DIFFUSER FOR GX53 LED VERSION

NEW VERSION CCT SETTABLE LAMP

PIETRO

LAMP INCLUDED: 8x GX53 LED

LED GX53 LAMP INCLUDED

CCT SET

8x10W 80W

U45.000.D8K

FLAT DIFFUSER FOR GX53 LED VERSION

NEW VERSION CCT SETTABLE LAMP

GLOBE 400/GLOBE 500
CLASSIC RANGE



MADE IN
ITALY



AVAILABLE COLORS				
RESIN BODY (MOULDED COLOURS)		DIFFUSER		
BLACK (A)	WHITE (W)	CLEAR (X)	OPAL (Y)	SMOKED (Z)



GLOBE 400



E27	G40.B40.E27
-----	-------------

ALUMINIUM CHROME LOUVRE

UPWARD .FC1

DOWNWARD .FC6

GLOBE 500



E27	G50.B50.E27
E40	G50.B50.E40

ALUMINIUM CHROME LOUVRE

UPWARD .FC1

DOWNWARD .FC6

E27 VERSION

SUITABLE FOR

HQI - SON

CLASSIC POLES



ANTI CORROSION

UV-RAYS STABILIZED

NO MAINTENANCE

DOUBLE INSULATION

NOT AFFECTED BY CHEMICAL FERTILIZERS

ANTI RUST
LIFETIME GUARANTEE
NO PAINTING REQUIRED
MADE IN ITALY



EACH POST IS SUPPLIED WITH THE SUITABLE CAGE FOR FIXATION

NEBO		TABOR		HOREB		KARMEL 3000		KARMEL 3500	
without door	000.201	without door	000.204	without door	000.207	without door	000.231	without door	000.234
with door	000.202	with door	000.205	with door	000.208	with door	000.232	with door	000.235
with door & box	000.203	with door & box	000.206	with door & box	000.209	with door & box	000.233	with door & box	000.236
cage type C		cage type C		cage type C		cage type C		cage type C	

AVAILABLE COLORS MOULDED COLOURS		EACH POST IS SUPPLIED WITH THE SUITABLE CAGE FOR FIXATION			
BLACK (A)	WHITE (W)	CAGE - C	CAGE - D	CAGE - E	
KARMEL 4000		GIONA 4000		GIONA 4500	
without door	000.237	without door	000.221	without door	000.224
with door	000.238	with door	000.222	with door	000.225
with door & box	000.239	with door & box	000.223	with door & box	000.226
cage type D		cage type E		cage type E	
GIONA 5000					
without door	000.227	without door	000.227	without door	000.227
with door	000.228	with door	000.228	with door	000.228
with door & box	000.229	with door & box	000.229	with door & box	000.229
cage type E		cage type E			

WALL BRACKETS/BASE



POST TOP SYSTEMS

OFIR WALL BRACKET

H.132.WAL

suggested diffuser:
SILOE - NOEMI
SIMON - TOBIA
GLOBE 400

FULLY MODULAR

The unique 60mm hub allows thousands of different possible combinations to create your perfect outdoor light fitting.

ADAM WALL BRACKET

H.171.WAL

suggested diffuser:
SILOE - NOEMI
SIMON - TOBIA
ELIA - PIETRO
GLOBE

LOT BASE

H.113

suggested diffuser:
SILOE - NOEMI
SIMON - TOBIA
ELIA - PIETRO
GLOBE

ARON WALL BRACKET

H.172 + H.172.WAL

suggested diffuser:
ELIA - PIETRO
GLOBE 500

ARON SYSTEM 1L

000.000.N10

suggested diffuser:
ELIA - PIETRO
GLOBE 500

OFIR SYSTEM 2L

000.000.R20

suggested diffuser:
SILOE - NOEMI
SIMON - TOBIA
GLOBE 400

OFIR SYSTEM 3L

000.000.R30

suggested diffuser:
SILOE - NOEMI
SIMON - TOBIA
GLOBE 400

ADAM SYSTEM 2L

000.000.M20

suggested diffuser:
SILOE - NOEMI
SIMON - TOBIA
ELIA - PIETRO
GLOBE

ADAM SYSTEM 3L

000.000.M30

suggested diffuser:
SILOE - NOEMI
SIMON - TOBIA
ELIA - PIETRO
GLOBE

ARON SYSTEM 2L

000.000.N20

suggested diffuser:
ELIA - PIETRO
GLOBE 500

ARON SYSTEM 4L

000.000.N40

suggested diffuser:
ELIA - PIETRO
GLOBE 500



GIORGIO

GINO

REMO

VIVI

ECOVIVI

BEPPE

ECOBEPPE

GLOBE

GIORGIO PAG 35
ROSA PAG 35

GINO400 PAG 40
GINO500 PAG 46

REMO400 PAG 40
REMO500 PAG 46

VIVI400 PAG 36
VIVI500 PAG 42

ECOVIVI400 PAG 38
ECOVIVI500 PAG 44

BEPPE400 PAG 36
BEPPE500 PAG 42

ECOBEPPE400 PAG 38
ECOBEPPE500 PAG 44

GLOBE400 PAG 48
GLOBE500 PAG 48




**MODERN
RANGE**

E27 HIGH POWER LED

MODERN RANGE




E27 HIGH POWER LED



for details see pag. 59



EKTOR 3000
MIDIPIJAR/
VIVI 400 1L
for details see pag. 36



3255

V50.364.A10.H1L

MADE IN ITALY

P50.361.H1L

EKTOR 2500/
BEPPE 400
for details see pag. 36



3065

EKTOR 2500/
GIORGIO
for details see pag. 35

4P2.361.G10.E28



2700



MADE IN
ITALY

MADE IN ITALY

R50.254.Q1K

MIDIPIJAR/
REMO 400
for details see pag. 40

F50.115.Q1K

NEW LOT/
GINO 400
for details see pag. 40

ADVANTAGES



ANTI CORROSION



NO MAINTENANCE




UV-RAYS STABILIZED





DOUBLE INSULATION



NOT AFFECTED BY
CHEMICAL FERTILIZES



FULLY MODULAR
Ø60mm

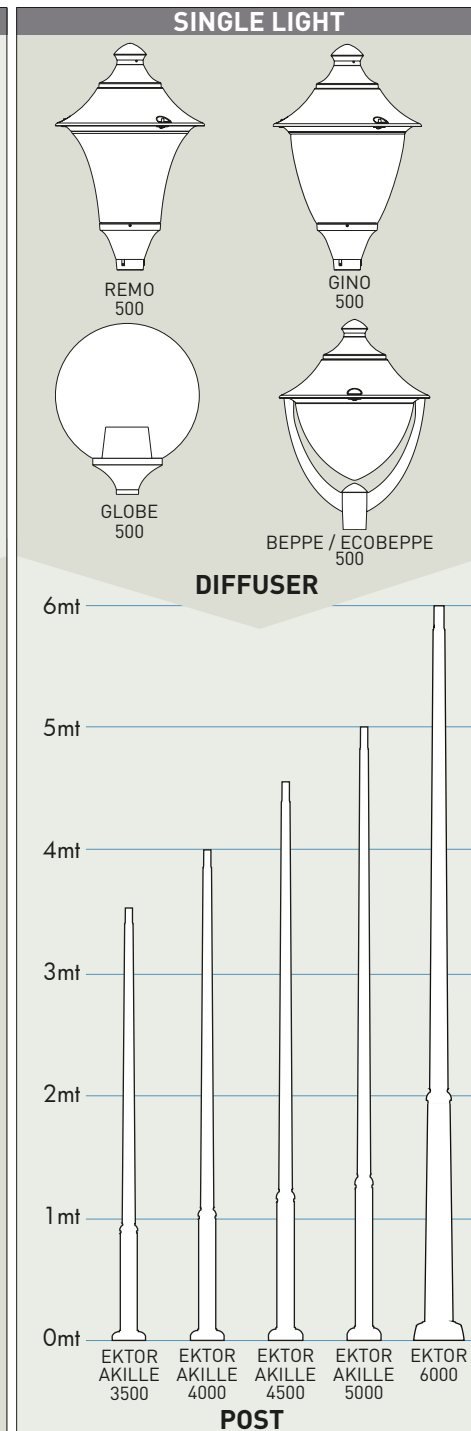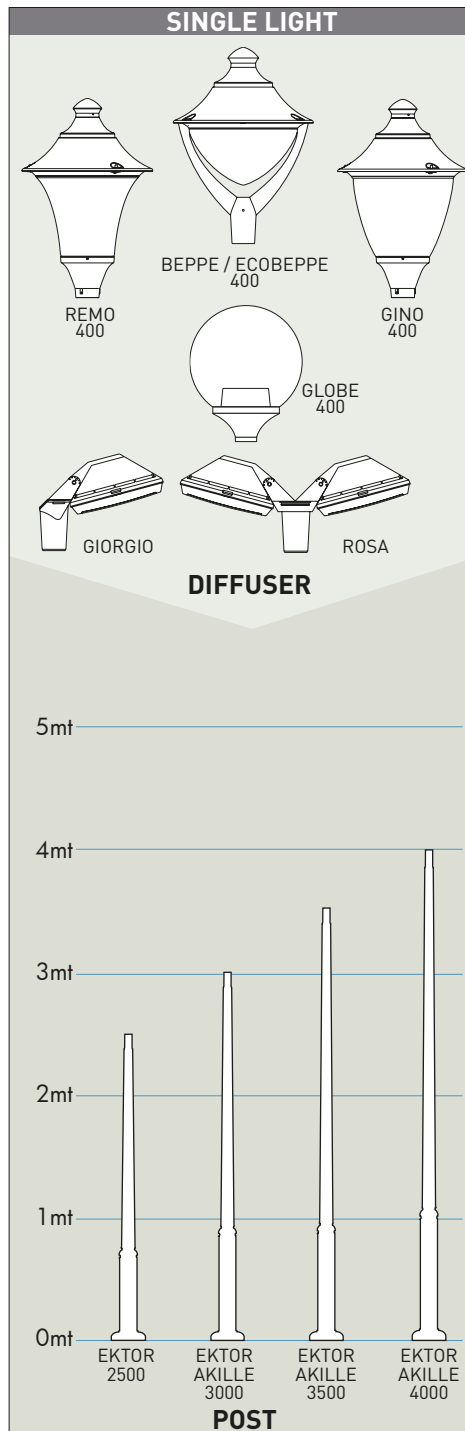

**RESIN
POST OF
A SINGLE
PIECE
WITHOUT
JOINTS**

Stronger, safer
and more
durable

INNER METAL POLE STRUCTURE

Structural metal pole hot deep galvanized inside and outside by zinc bath immersion.

EXPANSE

High Density rigid polyurethane provides lightweight and durable cohesion between the inner metal post and the outer resin cover.



OUTER RESIN COVER

Outer coating of a single piece without joints made of shockproof resin material:

- Rust and corrosion-free
- Paste molded colors, UV stabilized
- Self-extinguishing on fire




SUGGESTED COMBINATIONS

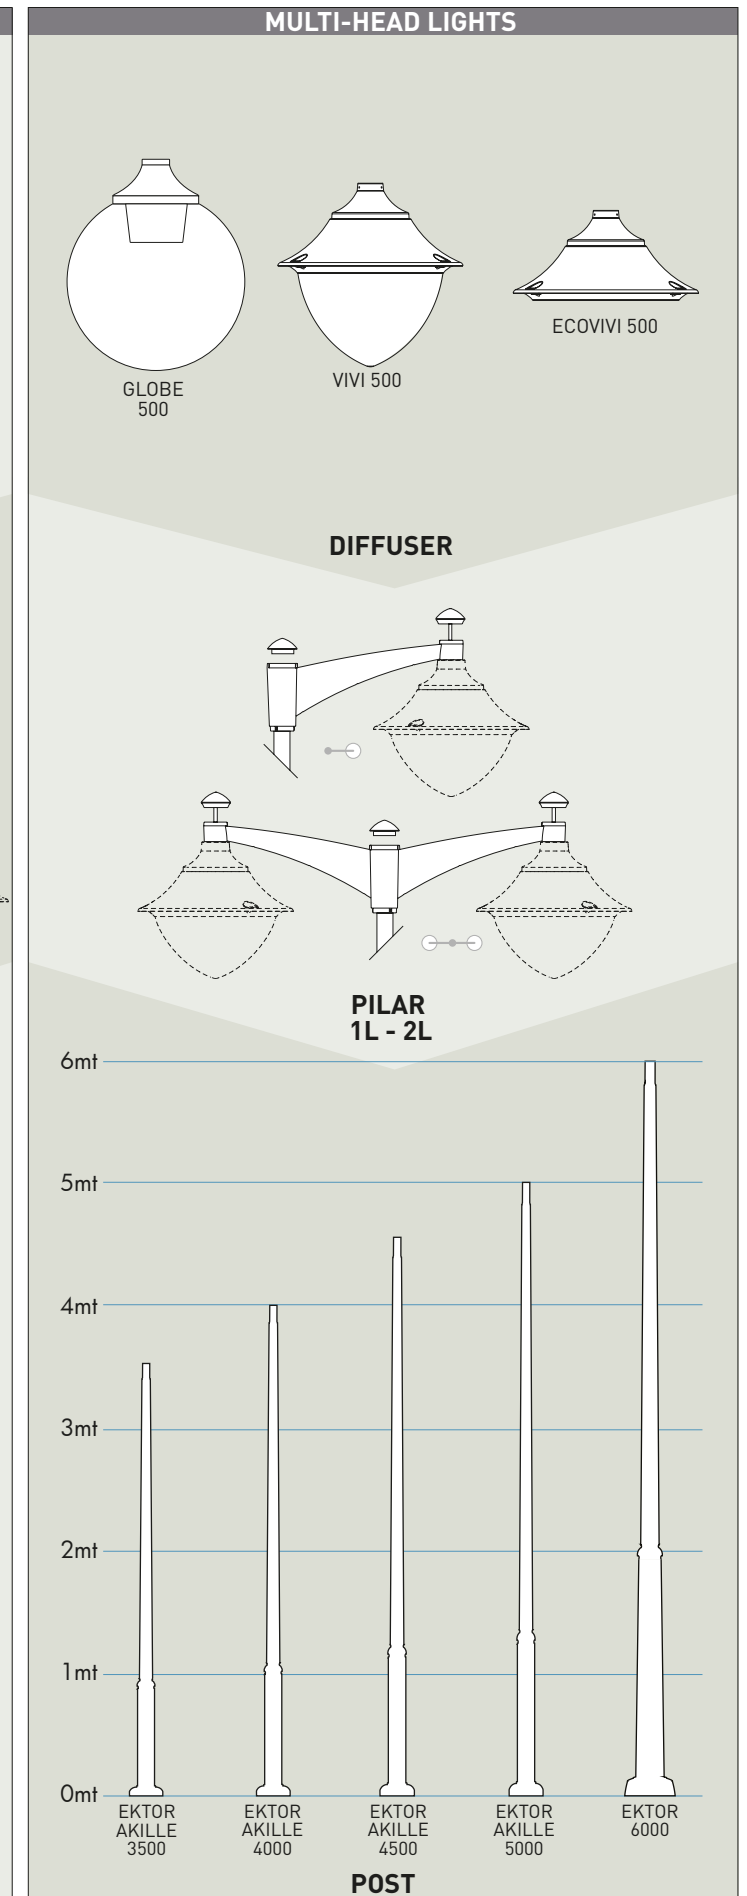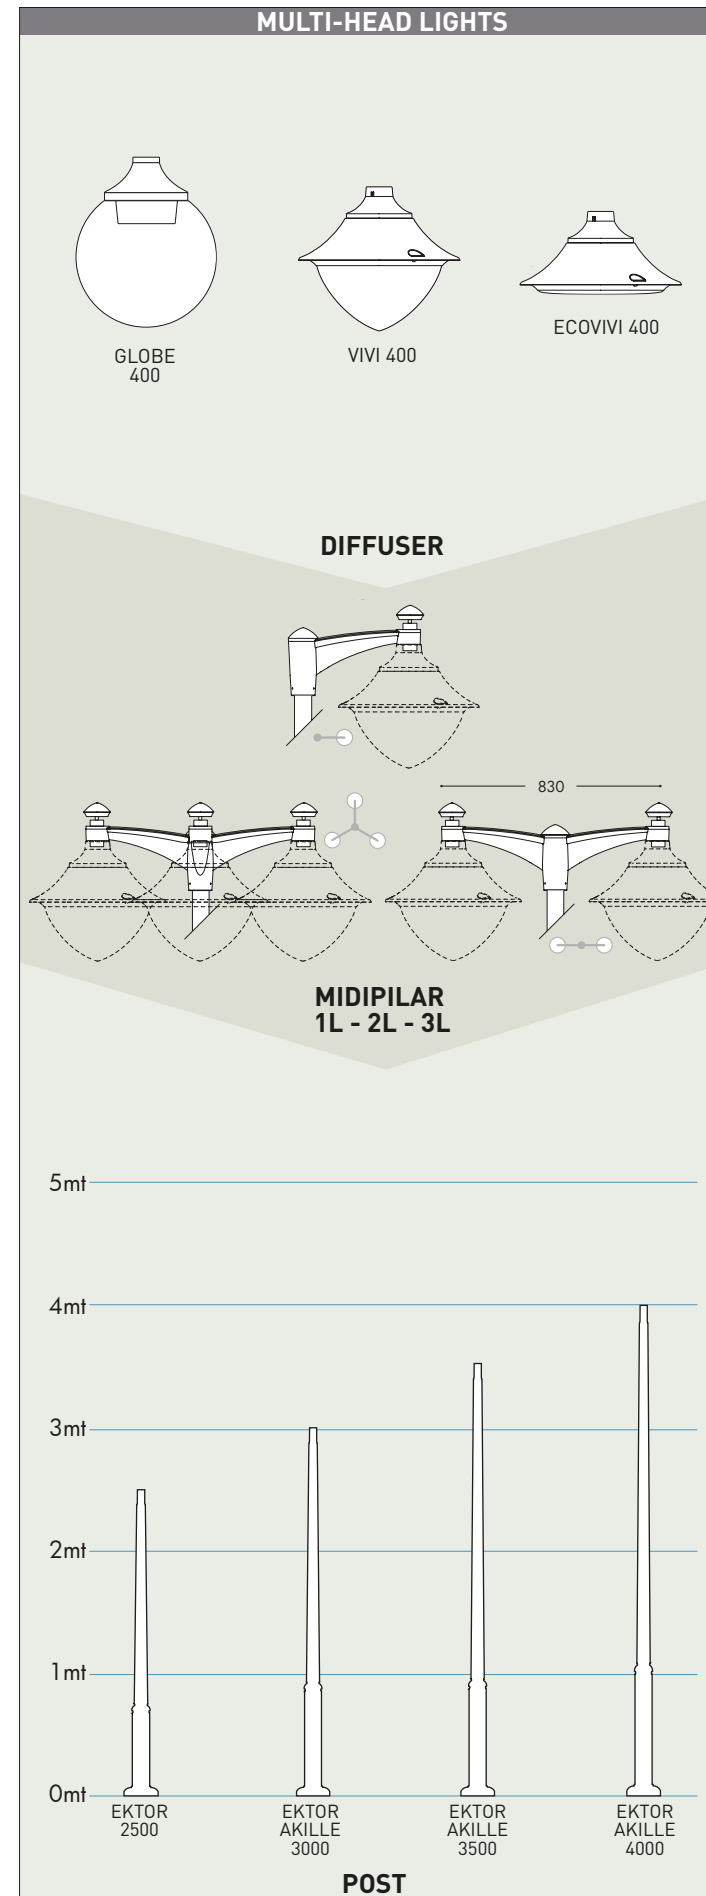

GIORGIO/ROSA

MODERN RANGE



MADE IN ITALY



CCT SETTABLE

3000 K

4000 K

6500 K

SDCM <6

GX53 MODULAR LED LIGHT SYSTEM

- Cost saving:**
long-life and efficient LED light sources
- Built-in driver:**
quick and easy lamp replacement
- Great flexibility:**
GX53 standard lamp holder
- Future-proofed luminaries:**
performances easy to upgrade to latest technology developments

AVAILABLE COLORS

RESIN BODY (MOULDED COLOURS)

BLACK (A)

GREY (L)

WHITE (W)

DIFFUSER

OPAL (Y)

AVAILABLE VERSIONS

GX53 LED

CCT SET

LED GX53

4x GX53

CCT SET

LED GX53

2x E27

CFL

LED



GIORGIO/ROSA GX53 LED					
LAMP	POWER	LUMINOUS FLUX (Φ TOTAL)	VOLTAGE RANGE	CCT SETTABLE	
	4x10W 40W	5160 lm	100-240V 50/60 Hz	6500K/4000K/3000K	TOBIA-SIMON HQI-SON 100W

LED BULKHEAD GX53					
LAMP	POWER	LUMINOUS FLUX (Φ TOTAL)	VOLTAGE RANGE	CCT SETTABLE	
	17W	2350 lm	100-240V 50/60 Hz	6500K/4000K/2700K	150W INCANDESCENT

GX53 LED

LAMP INCLUDED:
4x GX53 LED

GIORGIO

2xE27

4P2.000.G10.E28

GX53 17W
CCT SET
4P1.000.G10.E1K

4x10W 40W
CCT SET
4P2.000.G10.D4K

NEW VERSION
CCT SETTABLE LAMP

GX53 LED

LAMP INCLUDED:
8x GX53 LED

ROSA

2xE27

4P2.000.G20.E28


GX53 36W
CCT SET
4P1.000.G20.E1K

2x40W 80W
CCT SET
4P2.000.G20.D4K

NEW VERSION
CCT SETTABLE LAMP

VIVI/BEPPE 400

MODERN RANGE



MADE IN ITALY



NEW HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C
-30°

90% HUMIDITY

VOLTAGE SURGE RESISTANT

30W (3620 lm)
50W (6550 lm)

More details at page 59



AVAILABLE COLORS				
RESIN BODY (MOULDED COLOURS)			DIFFUSER	
BLACK (A)	GREY (L)	WHITE (W)	CLEAR (X)	OPAL (Y)



VIVI/BEPPE 400 GX53 LED					
LAMP	POWER	LUMINOUS FLUX (Φ TOTAL)	VOLTAGE RANGE	CCT SETTABLE	
	6x10W 60W	7740 lm	100-240V 50/60 Hz	6500K/4000K/3000K	VIVI-BEPPE 400 HQI-SON 100W

VIVI/BEPPE 400 HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX UP TO	VOLTAGE RANGE	COLOUR TEMPERATURE	
	30W	3620 lm	100-240V 50/60 Hz	4000K/3000K CCT SET	VIVI-BEPPE 400 HQI-SON 50W
	50W	6550 lm	100-240V 50/60 Hz	4000K 3000K	VIVI-BEPPE 400 HQI-SON 70W


GX53 LED

LAMP INCLUDED:
6x GX53 LED



VIVI 400

30W CCT SET V50.000.Q1K
4000K V50.000.H1L
50W 3000K V50.000.H1R
6x10W 60W CCT SET V50.000.D6K



HIGH POWER LED

LAMP INCLUDED:
HIGH POWER LED E27




GX53 LED

LAMP INCLUDED:
6x GX53 LED



BEPPE 400

30W CCT SET P50.000.Q1K
4000K P50.000.H1L
50W 3000K P50.000.H1R
6x10W 60W CCT SET P50.000.D6K



HIGH POWER LED

LAMP INCLUDED:
HIGH POWER LED E27



MADE IN ITALY

ECOVIVI/ECOBEPPE 400

MODERN RANGE



MADE IN ITALY



CCT SETTABLE

3000 K

4000 K

6500 K

SDCM <6

GX53 MODULAR LED LIGHT SYSTEM

- Cost saving:** long-life and efficient LED light sources
- Built-in driver:** quick and easy lamp replacement
- Great flexibility:** GX53 standard lamp holder
- Future-proofed luminaries:** performances easy to upgrade to latest technology developments

AVAILABLE COLORS

RESIN BODY (MOULDED COLOURS)

BLACK (A)

GREY (L)

WHITE (W)

DIFFUSER

CLEAR (X)

UV

ANTI-SHOCK

RECYCLABLE

CE

CB

IP65

CLASS II

UV TREATED

DOUBLE INSULATION

ECOVIVI/ECOBEPPE 400 42W GX53 LED					
LAMP	POWER	LUMINOUS FLUX (Φ TOTAL)	VOLTAGE RANGE	CCT SETTABLE	
	6x7W 42W	5850 lm	100-240V 50/60 Hz	6500K/4000K/3000K	ECOVIVI- ECOBEPPE 400 =  70W HQI-SON

ECOVIVI/ECOBEPPE 400 60W GX53 LED					
LAMP	POWER	LUMINOUS FLUX (Φ TOTAL)	VOLTAGE RANGE	CCT SETTABLE	
	6x10W 60W	7740 lm	100-240V 50/60 Hz	6500K/4000K/3000K	ECOVIVI- ECOBEPPE 400 =  100W HQI-SON

GX53 LED

LAMP INCLUDED:
6x GX53 LED

E27

EV4.000.E27


E40

EV4.000.E40

6x10W
60W

CCT SET

EV4.000.D6K



NEW VERSION
CCT SETTABLE LAMP

E27 VERSION
SUITABLE FOR
HQI - SON

GX53 LED

LAMP INCLUDED:
6x GX53 LED

E27

EP5.000.E27


E40

EP5.000.E40

6x10W
60W

CCT SET

EP5.000.D6K



NEW VERSION
CCT SETTABLE LAMP

E27 VERSION
SUITABLE FOR
HQI - SON

GINO/REMO 400

MODERN RANGE



MADE IN ITALY

NEW VERSION
HIGH POWER LED

NEW HIGH POWER LED

INDOOR &
OUTDOOR
USE

+80°C
-30°

90%
HUMIDITY

VOLTAGE SURGE
RESISTANT

30W (3620 lm)
50W (6550 lm)

More details at page 59



AVAILABLE COLORS				
RESIN BODY (MOULDED COLOURS)			DIFFUSER	
BLACK (A)	GREY (L)	WHITE (W)	CLEAR (X)	OPAL (Y)



GINO/REMO 400 GX53 LED					
LAMP	POWER	LUMINOUS FLUX (Φ TOTAL)	VOLTAGE RANGE	CCT SETTABLE	
	6x10W 60W	7740 lm	100-240V 50/60 Hz	6500K/4000K/3000K	GINO-REMO 400 = 100W HQI-SON

GINO/REMO 400 HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX UP TO	VOLTAGE RANGE	COLOUR TEMPERATURE	
E27 HIGH POWER LED 	30W	3620 lm	100-240V 50/60 Hz	4000K/3000K CCT SET	GINO-REMO 400 = 50W HQI-SON
E27 HIGH POWER LED 	50W	6550 lm	100-240V 50/60 Hz	4000K 3000K	GINO-REMO 400 = 70W HQI-SON

GX53 LED

LAMP INCLUDED:
6x GX53
LED

GINO 400


30W CCT SET F50.000.Q1K

4000K F50.000.H1L

50W 3000K F50.000.H1R

6x10W CCT SET F50.000.D6K

60W

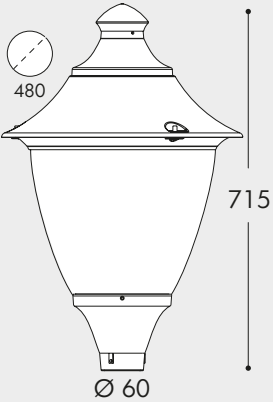

NEW VERSION
CCT SETTABLE LAMP

HIGH POWER LED

LAMP INCLUDED:
HIGH POWER
LED E27

GX53 LED

LAMP INCLUDED:
6x GX53
LED

REMO 400


30W CCT SET R50.000.Q1K

4000K R50.000.H1L

50W 3000K R50.000.H1R

6x10W CCT SET R50.000.D6K

60W

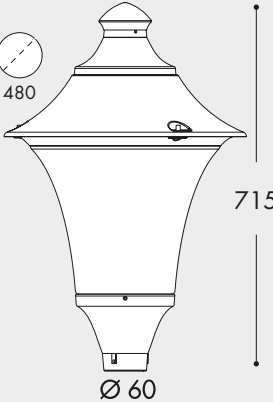

NEW VERSION
CCT SETTABLE LAMP


HIGH POWER LED

LAMP INCLUDED:
HIGH POWER
LED E27

MADE IN ITALY

VIVI/BEPPE 500

MODERN RANGE



MADE IN ITALY



NEW HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C
-30°

90% HUMIDITY

VOLTAGE SURGE RESISTANT

50W (6550 lm)
60W (7600 lm)

More details at page 59



AVAILABLE COLORS				
RESIN BODY (MOULDED COLOURS)			DIFFUSER	
BLACK (A)	GREY (L)	WHITE (W)	CLEAR (X)	OPAL (Y)



VIVI/BEPPE 500 GX53 LED					
LAMP	POWER	LUMINOUS FLUX (Φ TOTAL)	VOLTAGE RANGE	CCT SETTABLE	
	9x10W 90W	11610m	100-240V 50/60 Hz	6500K/4000K/3000K	VIVI-BEPPE 500 HQI-SON 150W

VIVI/BEPPE 500 HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX UP TO	VOLTAGE RANGE	COLOUR TEMPERATURE	
	50W	6550 lm	100-240V 50/60 Hz	4000K 3000K	VIVI-BEPPE 500 HQI-SON 70W
	60W	7600 lm	100-240V 50/60 Hz	4000K 3000K	VIVI-BEPPE 500 HQI-SON 100W


GX53 LED

LAMP INCLUDED:
9x GX53 LED



NEW VERSION
CCT SETTABLE LAMP

VIVI 500	
50W	4000K V60.000.H1L 3000K V60.000.H1R
60W	4000K V60.000.W1L 3000K V60.000.W1R
9x10W 90W	CCT SET V60.000.D9K

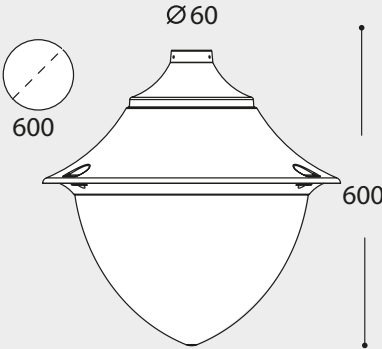

HIGH POWER LED

LAMP INCLUDED:
HIGH POWER LED E27




GX53 LED

LAMP INCLUDED:
9x GX53 LED



NEW VERSION
CCT SETTABLE LAMP

BEPPE 500	
50W	4000K P60.000.H1L 3000K P60.000.H1R
60W	4000K P60.000.W1L 3000K P60.000.W1R
9x10W 90W	CCT SET P60.000.D9K

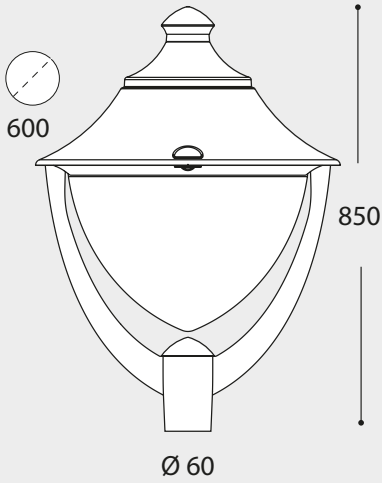

HIGH POWER LED

LAMP INCLUDED:
HIGH POWER LED E27



MADE IN ITALY

ECOVIVI/ECOBEPPE 500

MODERN RANGE



MADE IN ITALY



CCT SETTABLE

3000 K

4000 K

6500 K

SDCM <6

GX53 MODULAR LED LIGHT SYSTEM

- Cost saving:** long-life and efficient LED light sources
- Built-in driver:** quick and easy lamp replacement
- Great flexibility:** GX53 standard lamp holder
- Future-proofed luminaries:** performances easy to upgrade to latest technology developments

AVAILABLE COLORS

RESIN BODY (MOULDED COLOURS)

BLACK (A)

GREY (L)

WHITE (W)

DIFFUSER

CLEAR (X)



ECOVIVI/ECOBEPPE 500 90W GX53 LED					
LAMP	POWER	LUMINOUS FLUX (Φ TOTAL)	VOLTAGE RANGE	CCT SETTABLE	
	9x10W 90W	11610 lm	100-240V 50/60 Hz	6500K/4000K/3000K	ECOVIVI - ECOBEPPE 500 150W HQI-SON

GX53 LED

LAMP INCLUDED: 9x GX53 LED

ECOVIVI 500

E27 EV6.000.E27

E40 EV6.000.E40

9x10W 90W

CCT SET

EV6.000.D9K

NEW VERSION

CCT SETTABLE LAMP

E27 VERSION

SUITABLE FOR

HQI - SON

GX53 LED

LAMP INCLUDED: 9x GX53 LED

ECOBEPPE 500

E27 EP6.000.E27

E40 EP6.000.E40

9x10W 90W

CCT SET

EP6.000.D9K

NEW VERSION

CCT SETTABLE LAMP

E27 VERSION

SUITABLE FOR

HQI - SON

MADE IN ITALY

GINO/REMO 500

MODERN RANGE



MADE IN ITALY

NEW VERSION
HIGH POWER LED

NEW HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C

-30°

90% HUMIDITY

VOLTAGE SURGE RESISTANT

50W (6550 lm)

60W (7600 lm)

More details at page 59

AVAILABLE COLORS				
RESIN BODY (MOULDED COLOURS)			DIFFUSER	
BLACK (A)	GREY (L)	WHITE (W)	CLEAR (X)	OPAL (Y)



GINO/REMO 500 GX53 LED					
LAMP	POWER	LUMINOUS FLUX (Φ TOTAL)	VOLTAGE RANGE	CCT SETTABLE	
	9x10W 90W	11610 lm	100-240V 50/60 Hz	6500K/4000K/3000K	GINO-REMO 500 HQI-SON 148W

GINO/REMO 500 HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX UP TO	VOLTAGE RANGE	COLOUR TEMPERATURE	
	50W	6550 lm	100-240V 50/60 Hz	4000K 3000K	VIVI-BEPPE 500 HQI-SON 70W
	60W	7600 lm	100-240V 50/60 Hz	4000K 3000K	VIVI-BEPPE 500 HQI-SON 100W

GINO 500

LAMP INCLUDED: 9x GX53 LED

50W

4000K

F60.000.H1L

3000K

F60.000.H1R

60W

4000K

F60.000.W1L

3000K

F60.000.W1R

9x10W 90W

CCT SET

F60.000.D9K

NEW VERSION CCT SETTABLE LAMP

HIGH POWER LED

LAMP INCLUDED: HIGH POWER LED E27

REMO 500

LAMP INCLUDED: 9x GX53 LED

50W

4000K

R60.000.H1L

3000K

R60.000.H1R

60W

4000K

R60.000.W1L

3000K

R60.000.W1R

9x10W 90W

CCT SET

R60.000.D9K


NEW VERSION CCT SETTABLE LAMP

HIGH POWER LED

LAMP INCLUDED: HIGH POWER LED E27

GLOBE 400/GLOBE 500

MODERN RANGE



MADE IN ITALY



AVAILABLE COLORS					
RESIN BODY (MOULDED COLOURS)			DIFFUSER		
BLACK (A)	GREY (L)	WHITE (W)	CLEAR (X)	OPAL (Y)	SMOKED (Z)



GLOBE 400



E27	G41.B40.E27
------------	-------------

GLOBE 500



E27	G51.B50.E27
E40	G51.B50.E40

E27 VERSION
SUITABLE FOR
HQI - SON

MODERN POLES



ANTI RUST
LIFETIME GUARANTEE
NO PAINTING REQUIRED
MADE IN ITALY

ANTI CORROSION

UV-RAYS STABILIZED

NO MAINTENANCE


DOUBLE INSULATION

NOT AFFECTED BY CHEMICAL FERTILIZERS




EACH POST IS SUPPLIED WITH THE SUITABLE CAGE FOR FIXATION

EKTOR 2500		EKTOR 3000		AKILLE 3000		EKTOR 3500		AKILLE 3500	
without door	000.361	without door	000.364	000.414		without door	000.367	000.417	
with door	000.362	with door	000.365	000.415		with door	000.368	000.418	
with door & box	000.363	with door & box	000.366	000.416		with door & box	000.369	000.419	

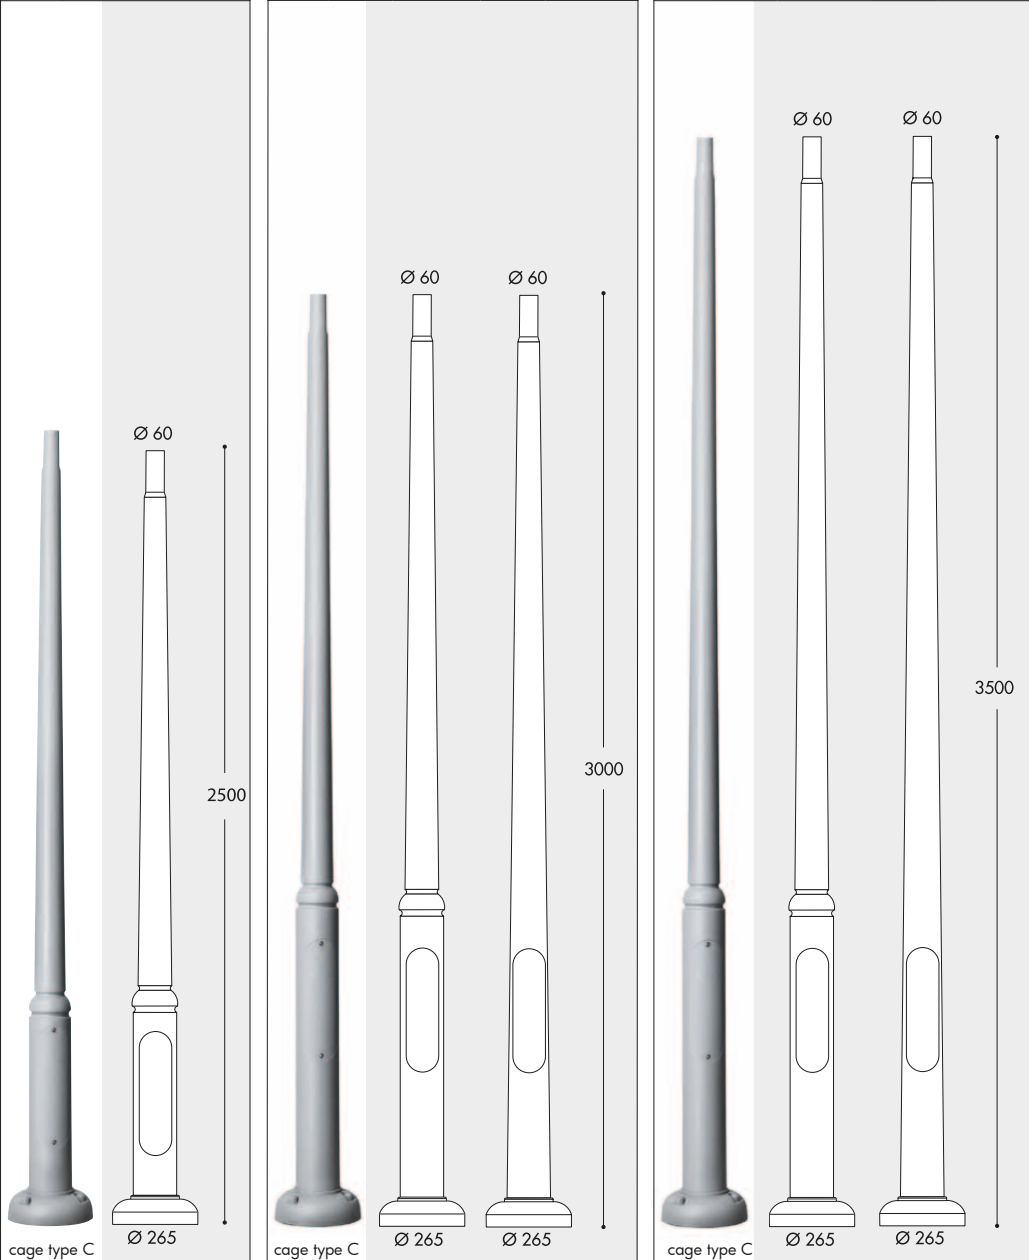

EKTOR 4000		AKILLE 4000	
without door	000.371	000.421	
with door	000.372	000.422	
with door & box	000.373	000.423	

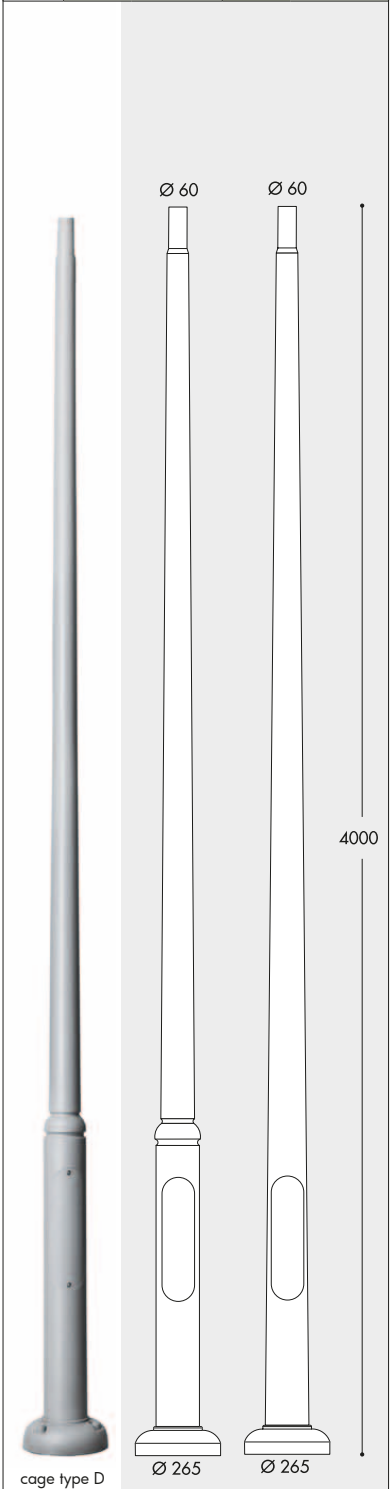


AVAILABLE COLORS
MOULDED COLOURS

BLACK (A) GREY (L) WHITE (W)


EACH POST IS SUPPLIED WITH THE SUITABLE CAGE FOR FIXATION

CAGE - C **CAGE - D** **CAGE - E**


EKTOR 4500		AKILLE 4500	
without door	000.374	000.424	
with door	000.375	000.425	
with door & box	000.376	000.426	

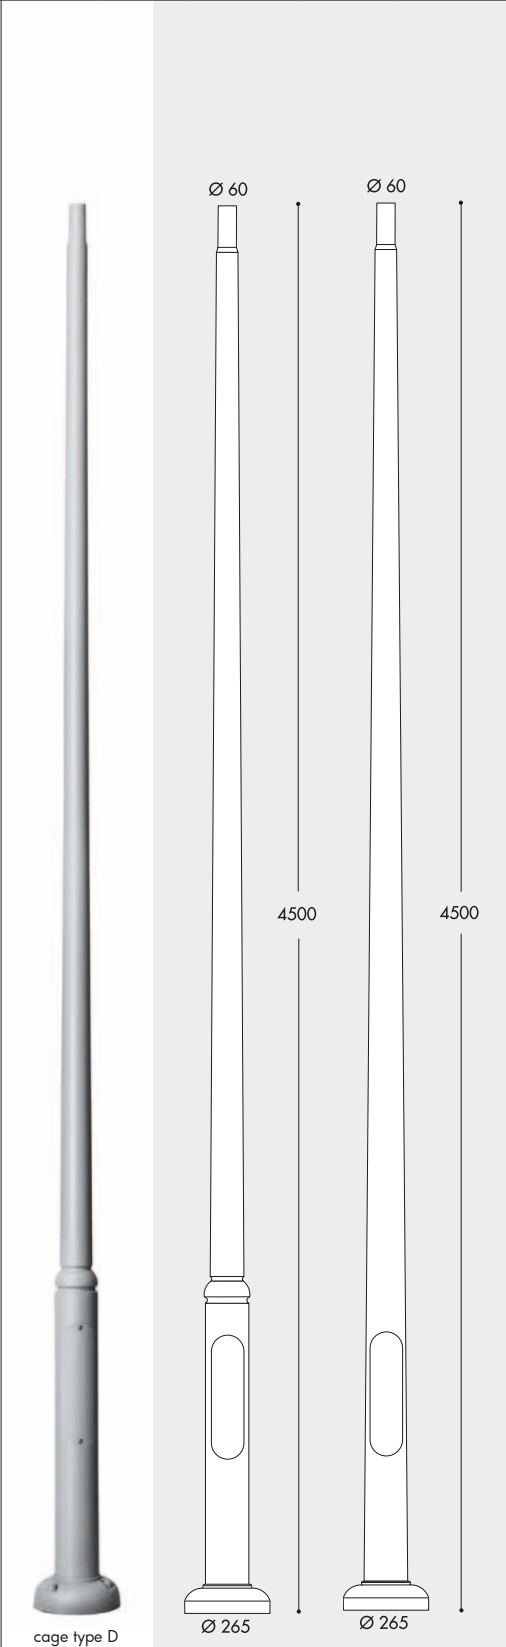

EKTOR 5000		AKILLE 5000	
without door	000.377	000.427	
with door	000.378	000.428	
with door & box	000.379	000.429	

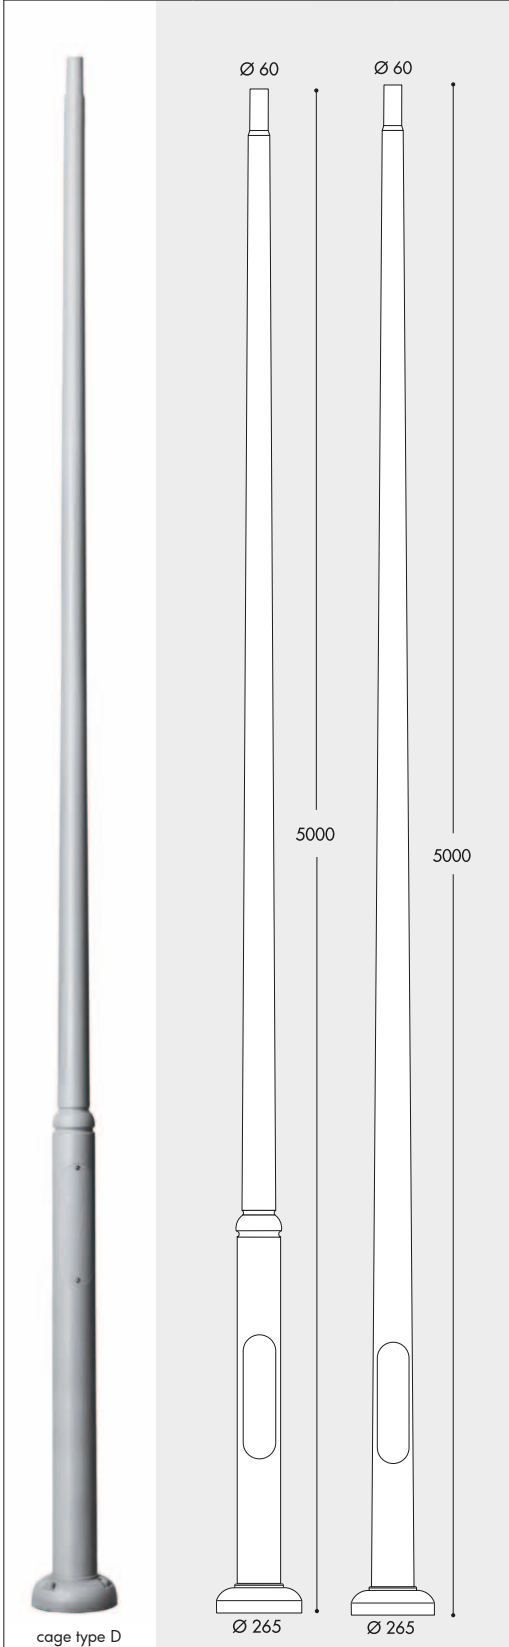

EKTOR 6000	
without door	000.384
with door	000.385
with door & box	000.386

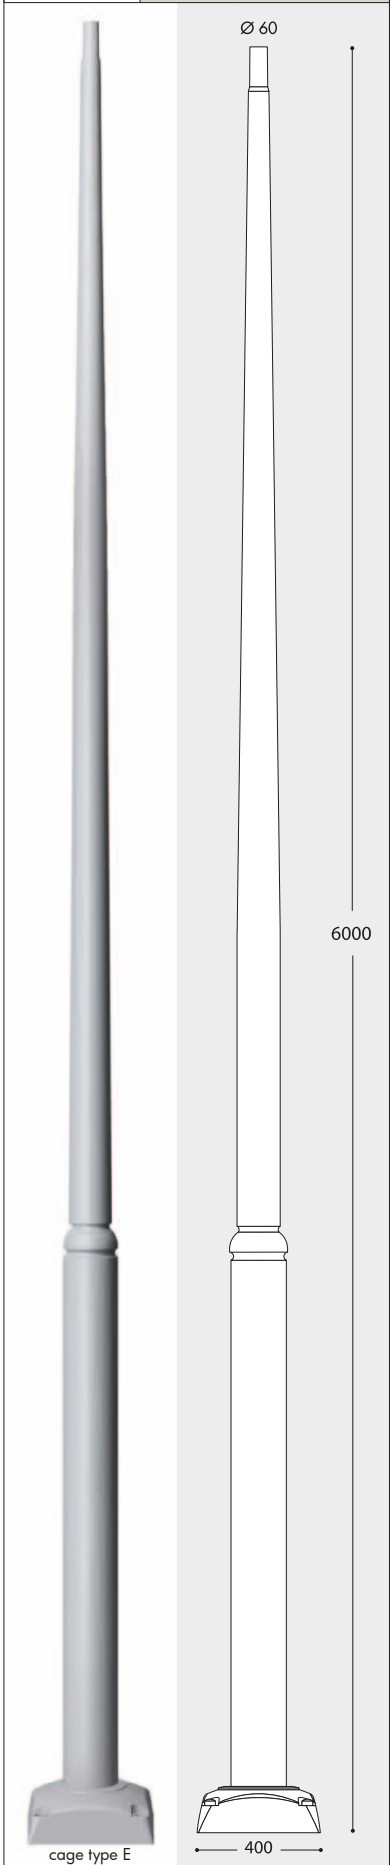

MIDIPILAR WALL BRACKET

H.254.WAL

suitable for:
GINO 400 - REMO400
VIVI 400 - ECOVIVI 400
GLOBE 400

MIDIPILAR SYSTEM 1L

000.000.A10

Ø60

suitable for:
VIVI 400 - ECOVIVI 400
GLOBE 400

MIDIPILAR SYSTEM 2L

000.000.A20

Ø60

suitable for:
VIVI 400 - ECOVIVI 400
GLOBE 400

MIDIPILAR SYSTEM 3L

000.000.A30

Ø60

suitable for:
VIVI 400 - ECOVIVI 400
GLOBE 400

PILAR WALL BRACKET

H.253.WAL

suitable for:
GINO 500 - REMO 500
VIVI 500 - ECOVIVI 500
BEPPE 500 - GLOBE 500

PILAR SYSTEM 1L

000.000.P10

Ø60

suitable for:
VIVI 500 - ECOVIVI 500
GLOBE 500

PILAR SYSTEM 2L

000.000.P20

Ø60

suitable for:
VIVI 500 - ECOVIVI 500
GLOBE 500

NEW LOT BASE

H.115

Ø60

suitable for:
GINO 400 - REMO400
VIVI 400 - ECOVIVI 400
BEPPE 400 - ECOBEPPE 400
GLOBE 400 - GINO 500
REMO500 - VIVI 500
ECOVIVI 500 - GLOBE 500

Ø 60mm

FULLY MODULAR
The unique 60mm hub allows thousands of different possible combinations to create your perfect outdoor light fitting.

LUIGI HIGH-BAY
 MODERN RANGE



MADE IN ITALY



CCT SETTABLE

SDCM <6

3000 K 4000 K 6500 K

GX53 MODULAR LED LIGHT SYSTEM

- **Cost saving:** long-life and efficient LED light sources
- **Built-in driver:** quick and easy lamp replacement
- **Great flexibility:** GX53 standard lamp holder
- **Future-proofed luminaries:** performances easy to upgrade to latest technology developments

NEW HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C
-30°

90% HUMIDITY

VOLTAGE SURGE RESISTANT

50W (6550 lm)
60W (7600 lm)

More details at page 59

AVAILABLE COLORS

RESIN BODY (MOULDED COLOURS)

BLACK (A) GREY (L) WHITE (W)

DIFFUSER

CLEAR (X) OPAL (Y)

UV TREATED ANTI-SHOCK RECYCLABLE CE CB IEC60598 CB SCHEME IP65 CLASS II DOUBLE INSULATION

HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX UP TO	VOLTAGE RANGE	COLOUR TEMPERATURE	
E27 HIGH POWER LED Ø 100	30W	3620 lm	100-240V 50/60 Hz	4000K/3000K CCT SET	= 50W HQI-SON
E27 HIGH POWER LED Ø 118	50W	6550 lm	100-240V 50/60 Hz	4000K 3000K	= 70W HQI-SON
E27 HIGH POWER LED Ø 132	60W	7600 lm	100-240V 50/60 Hz	4000K 3000K	= 100W HQI-SON

GX53 LED					
LAMP	POWER	LUMINOUS FLUX (Φ TOTAL)	VOLTAGE RANGE	CCT SETTABLE	
GX53	6x10W 60W	7740 lm	100-240V 50/60 Hz	6500K/4000K/3000K	= 100W HQI-SON
GX53	9x10W 90W	11610 lm	100-240V 50/60 Hz	6500K/4000K/3000K	= 150W HQI-SON

LUIGI 500-DR HIGH POWER LED

LAMP INCLUDED: HIGH POWER LED E27

50W LED 4000K L51.128.H1L
3000K L51.128.H1R

60W LED 4000K L51.128.W1L
3000K L51.128.W1R

600 680

9x10W **90W** CCT SET L5F.128.D9K

380 600

LUIGI 500 GX53 LED

LAMP INCLUDED: GX53 LED

NEW VERSION CCT SETTABLE LAMP

LUIGI 400-DR HIGH POWER LED

LAMP INCLUDED: HIGH POWER LED E27

30W LED CCT SET L41.128.Q1K

50W LED 4000K L41.128.H1L
3000K L41.128.H1R

480 500

6x10W **60W** CCT SET L4F.128.D6K

330 480

LUIGI 400 GX53 LED









LAMP INCLUDED: GX53 LED


NEW VERSION CCT SETTABLE LAMP








TÜV CERTIFIED LED MODULES



TÜV CERTIFIED LED MODULES

G9LED			
	POWER	1,7 W	
	LUMINOUS FLUX (Φ TOTAL)	3000 K	150 lm
		4000 K	150 lm
	SIZE & SOCKET		
		VOLTAGE	
		100-240 V	
	FREQUENCY	50/60 Hz	
		PSTLM (NO FLICKER)	
		<1	
	SVM	0,9	
		CRI	
		> 80	
	SDCM	<6	
		SWITCHING CYCLE	
		>40.000	
	WARM UP TIME	≤ 0,5"	
		LIFETIME	
		15.000 h	
	KELVIN	3000 K	4000 K
		EFFICIENCY CLASS	
		F	
	REF. CODE	H.LED.G09.3K	H.LED.G09.4K
		COMPLY WITH:	
		EU 2019/2015	

GU10 LED - CCT SETTABLE			
	POWER	3,5 W	6 W
	LUMINOUS FLUX (Φ TOTAL)	2700 K	329 lm
		4000 K	366 lm
	SIZE & SOCKET		
		VOLTAGE	
		100-240 V	
	FREQUENCY	50/60 Hz	
		DISPLACEMENT FACTOR	
		>0	
	PSTLM (NO FLICKER)	<1	
		SVM	
		0,4	
	CRI	> 80	
		SDCM	
		<3	
	BEAM ANGLE	43°	
		SWITCHING CYCLE	
		> 25.000	
	WARM UP TIME	≤ 0,5"	
		LIFETIME	
		25.000 h	
	EFFICIENCY CLASS	F	
		REF. CODE	
		H.LED.GU10.CCT	
	COMPLY WITH:	EU 2019/2015	
		EU 2019/2020	

R7s LED 78mm- CCT SETTABLE			
SIZE & SOCKET	R7s	POWER	3,5W
		LUMINOUS FLUX (Φ TOTAL)	2700 K
			325 lm
	CCT SETTABLE	4000 K	365 lm
			6500 K
		365 lm	
	VOLTAGE	100-240 V	
		FREQUENCY	
		50/60 Hz	
	DISPLACEMENT FACTOR	>0	
		PSTLM (NO FLICKER)	
		<1	
	SVM	0,4	
		CRI	
		> 80	
	SDCM	<6	
		SWITCHING CYCLE	
		45.000	
	WARM UP TIME	≤ 0,5"	
		LIFETIME	
		25.000 h	
	EFFICIENCY CLASS	F	
		REF. CODE	
		H7.LED.R7S.CCT	

R7s LED 118mm- CCT SETTABLE			
SIZE & SOCKET	R7s	POWER	7,5 W
		LUMINOUS FLUX (Φ TOTAL)	2700 K
			680 lm
	CCT SETTABLE	4000 K	775 lm
			6500 K
		790 lm	
	VOLTAGE	100-240 V	
		FREQUENCY	
		50/60 Hz	
	DISPLACEMENT FACTOR	>0,5	
		PSTLM (NO FLICKER)	
		<1	
	SVM	0,4	
		CRI	
		> 80	
	SDCM	<6	
		SWITCHING CYCLE	
		45.000	
	WARM UP TIME	≤ 0,5"	
		LIFETIME	
		25.000 h	
	EFFICIENCY CLASS	F	
		REF. CODE	
		H8.LED.R7S.CCT	

R7s LED 189mm- CCT SETTABLE			
SIZE & SOCKET	R7s	POWER	10,5 W
		LUMINOUS FLUX (Φ TOTAL)	2700 K
			1000 lm
	CCT SETTABLE	4000 K	1130 lm
			6500 K
		1060 lm	
	VOLTAGE	100-240 V	
		FREQUENCY	
		50/60 Hz	
	DISPLACEMENT FACTOR	>0,7	
		PSTLM (NO FLICKER)	
		<1	
	SVM	0,4	
		CRI	
		> 80	
	SDCM	<6	
		SWITCHING CYCLE	
		45.000	
	WARM UP TIME	≤ 0,5"	
		LIFETIME	
		25.000 h	
	EFFICIENCY CLASS	F	
		REF. CODE	
		H9.LED.R7S.CCT	

NEW



CCT SETTABLE

2700 K

4000 K

6500 K

SDCM <6

INDOOR & OUTDOOR USE

-30 +80 °C

90% HUMIDITY

VOLTAGE SURGE RESISTANT

ENERGY LABEL

A

B

C

D

E

F

G

9 kWh/1000h

COMPLY WITH: EU 2019/2015 EU 2019/2020

TUV SUD

CE



CB

LVD

EMC

ERP

IECEE CB CERTIFICATE: SG PSB-LE-03297

POWER		8,5 W	11 W
LUMINOUS FLUX (Φ TOTAL)	2700 K	840 lm	1100 lm
	4000 K	920 lm	1200 lm
	6500 K	920 lm	1200 lm
SIZE & SOCKET		 86% savings =60W E27	 85% savings =75W E27
VOLTAGE		100-240 V	100-240 V
FREQUENCY		50/60 Hz	50/60 Hz
DISPLACEMENT FACTOR		>0,5	>0,7
PSTLM (NO FLICKER)		< 1	< 1
SVM		< 0,4	< 0,4
CRI		> 80	> 80
SDCM		<6	<6
LIFETIME		25.000 h	25.000 h
EFFICIENCY CLASS		F	F
REF. CODE		H.LED.A60.CCT	H2.LED.A60.CCT



CCT SETTABLE

3000 K

4000 K

SDCM <6

SILICONE PROTECTION DRIVER

INDOOR & OUTDOOR USE

-30 +80 °C

90% HUMIDITY

VOLTAGE SURGE RESISTANT

ENERGY LABEL

A

B

C

D

E

F

G

30 kWh/1000h

COMPLY WITH: EU 2019/2015 EU 2019/2020

TUV SUD

CE



CB

LVD

EMC

ERP

IECEE CB CERTIFICATE: SG PSB-LE-03834

POWER		15 W	30W
LUMINOUS FLUX (Φ TOTAL)	3000 K	1545 lm	3325lm
	4000 K	1690 lm	3620 lm
SIZE & SOCKET		 E27	 E27
VOLTAGE		100-240 V	100-240 V
FREQUENCY		50/60 Hz	50/60 Hz
DISPLACEMENT FACTOR		>0,7	>0,9
PSTLM (NO FLICKER)		<1	<1
SVM		0,4	0,4
CRI		> 80	> 80
SWITCHING CYCLE		30.000	30.000
WARM UP TIME		< 0,5"	< 1"
LIFETIME		25.000 h	25.000 h
EFFICIENCY CLASS		F	E
REF. CODE		H3.LED.HIP.CCT	H2.LED.HIP.CCT



ENERGY LABEL

A

B

C

D

E

F

G

7 kWh/1000h

COMPLY WITH: EU 2019/2015 EU 2019/2020

TUV SUD

CE


CB

LVD

EMC

ERP

IECEE CB CERTIFICATE: SG PSB-LE-03735

POWER		6,5 W
LUMINOUS FLUX (Φ TOTAL)	2700 K	800 lm
SIZE & SOCKET		 90% savings =60W E27
VOLTAGE		100-240 V
FREQUENCY		50/60 Hz
DISPLACEMENT FACTOR		>0,5
CRI		> 80
SWITCHING CYCLE		>100.000
WARM UP TIME		≤ 0,5"
LIFETIME		25.000 h
EFFICIENCY CLASS		E
REF. CODE		H.LED.FIL.3K



SILICONE PROTECTION DRIVER

INDOOR & OUTDOOR USE

-30 +80 °C

90% HUMIDITY

VOLTAGE SURGE RESISTANT

ENERGY LABEL

A

B

C

D

E

F

G

50 kWh/1000h

COMPLY WITH: EU 2019/2015 EU 2019/2020

TUV SUD

CE



CB

LVD

EMC


ERP


IECEE CB CERTIFICATE: SG PSB-LE-03791

POWER		50 W	60W		
LUMINOUS FLUX (Φ TOTAL)	3000 K	5850 lm	6600 lm		
	4000 K	6550 lm	7600 lm		
SIZE & SOCKET		 E27	 E27		
VOLTAGE		100-240 V	100-240 V		
FREQUENCY		50/60 Hz	50/60 Hz		
DISPLACEMENT FACTOR		>0,9	>0,9		
PSTLM (NO FLICKER)		<1	<1		
SVM		0,4	0,4		
CRI		> 80	> 80		
SWITCHING CYCLE		30.000	30.000		
WARM UP TIME		< 1"	< 0,5"		
LIFETIME		25.000 h	25.000 h		
KELVIN	3000 K	4000 K	3000 K	4000 K	
EFFICIENCY CLASS		E	E	E	E
REF. CODE		H.LED.HIP.3K	H.LED.HIP.4K	H4.LED.HIP.3K	H4.LED.HIP.4K

58

59


GX53 LED Ø75mm- CCT SETTABLE				
	POWER		3 W	
	LUMINOUS FLUX (Φ TOTAL)	3000 K	405 lm	
		4000 K	410 lm	
		6500 K	410 lm	
SIZE & SOCKET				
	GX53			

		  	LVD EMC ERP	LUMINOUS FLUX (Φ USE 120°)	335 lm
				VOLTAGE	100-240 V
				FREQUENCY	50/60 Hz
				PSTLM (NO FLICKER)	<1
 -30 +80 °C 90% HUMIDITY VOLTAGE SURGE RESISTANT		IECEE CB CERTIFICATE: SG PSB-LE-03887	SVM	0,4	
			CRI	> 80	
			SDCM	<6	
			BEAM ANGLE	112°	
			SWITCHING CYCLE	> 30.000	
			WARM UP TIME	0s	
			LIFETIME	25.000 h	
			EFFICIENCY CLASS	E	
			REF. CODE	H.LED.G53.CCT	

GX53 LED Ø180mm- CCT SETTABLE					
	POWER		7 W	11 W	18 W
	LUMINOUS FLUX (Φ TOTAL)	2700 K	790 lm	1325 lm	2118 lm
		4000 K	851 lm	1446 lm	2315 lm
		6500 K	887 lm	1470 lm	2340 lm
SIZE & SOCKET					
COMPLY WITH: EU 2019/2015 EU 2019/2020		IECEE CB CERTIFICATE: SG PSB-LE-03936			
LUMINOUS FLUX (Φ USE 120°)		650 lm	1100 lm	1720 lm	
VOLTAGE		100-240 V	100-240 V	100-240 V	
FREQUENCY		50/60 Hz	50/60 Hz	50/60 Hz	
DISPLACEMENT FACTOR		>0,5	>0,7	>0,7	
PSTLM (NO FLICKER)		<1	<1	<1	
SVM		0,9	0,9	0,9	
CRI		> 80	> 80	> 80	
SDCM		<6	<6	<6	
BEAM ANGLE (FWHM)		107°	107°	107°	
SWITCHING CYCLE		> 30.000	> 25.000	> 25.000	
WARM UP TIME		≤ 0,5"	≤ 0,5"	≤ 0,5"	
LIFETIME		25.000 h	25.000 h	25.000 h	
EFFICIENCY CLASS		F	E	E	
REF. CODE		H6.LED.G53.CCT	H4.LED.G53.CCT	H5.LED.G53.CCT	

GX53 LED Ø100mm - CCT SETTABLE				
	POWER		10W	
	LUMINOUS FLUX (Φ TOTAL)	3000 K	1190 lm	
		4000 K	1290 lm	
		6500 K	1210 lm	
SIZE & SOCKET				
LUMINOUS FLUX (Φ USE 120°)		975 lm		
VOLTAGE		100-240 V		
FREQUENCY		50/60 Hz		
DISPLACEMENT FACTOR		>0,5		
PSTLM (NO FLICKER)		< 1		
SVM		0,4		
CRI		> 80		
SDCM		<6		
BEAM ANGLE		112°		
SWITCHING CYCLE		> 30.000		
WARM UP TIME		0s		
LIFETIME		25.000 h		
EFFICIENCY CLASS		E		
REF. CODE		H3.LED.G53.CCT		

CCT SETTABLE SDCM <4			 CE CB LVD EMC ERP
 DRIVER INDOOR & OUTDOOR USE -30 +80 °C 90% HUMIDITY VOLTAGE SURGE RESISTANT			
COMPLY WITH: EU 2019/2015 EU 2019/2020			
IECEE CB SCHEME IECEE CB CERTIFICATE: SG PSB-IE-03887			

SOLAR MODULE - CCT SETTABLE				
 SOLAR ≥12 Hours TUV SDCM <6 3000 K 4000 K 6500 K		SIZE		
		 Ø160		
SUMMER MODE			LUMEN	42
			AUTONOMY	25h
WINTER MODE			LUMEN	20
			AUTONOMY	46h
SENSORE MODE			LUMEN	280
			ACTIVE TIME	25 sec
			N° Detections	423
SOLAR PANEL			5V/2W	
			Monocrystalline PET type	
			Antishock material	
CHARGING TIME			6h	
REPLACEABLE BATTERY			LiFePO4 IFR26650 3,3Ah, 3,2V	
			No Risk of explosion	
			Working temperature -10° to +60°C	
			Longer Lifetime	
PIR SENSOR			Detection angle 120°	
			Fields of detection up to 5 mt	
			Active for 25 sec.	
LED			3 CIRCUITS	SMD 3528
			COLOR RENDERING INDEX RA	> 80
			SDCM	< 6
			LIFETIME	30.000 h
			KELVIN SETTABLE	3000 K / 4000 K / 6500 K
REF. CODE			H.LED.SOL.CCT	



IECEE
CB
SCHEME

IECEE CB CERTIFICATE:
SG PSB-LE-02677M1



TUV
SUD

CE

CB

LVD

EMC

ERP

* available while stock last

LOOKING FOR SOMETHING ELSE?

GARDEN RANGE



PROJECT RANGE



TO SEE OUR COMPLETE COLLECTION

Ask for our NEW **General Catalogue 2023**
or visit our website at
www.fumagalli.it



RESIN MATERIAL ADVANTAGES



NO MAINTENANCE



ANTI-CORROSION




DOUBLE INSULATION



NOT AFFECTED BY
CHEMICAL FERTILIZERS




UV-RAY STABILIZED




RECYCLABLE




UV TREATED



DOUBLE INSULATION



ANTI-SHOCK



TEMPERATURE



ENERGY SAVING



RESIDENTIAL



PUBLIC

HOW TO READ THE CODE

DIFFUSER
IDENTIFIES
THE DIFFUSER

V50

STRUCTURE
IDENTIFIES THE
STRUCTURE ON
WHICH THE DIFFUSER
IS MOUNTED (POLE,
BRACKET, BASE, SPIKE)

361

SYSTEM
IDENTIFIES THE
MULTILIGHT
SYSTEM IF PRESENT

A20

**COLOUR OF THE
STRUCTURE**
IDENTIFIES THE COLOUR
OF THE STRUCTURE
A BLACK
W WHITE
L GREY

A

**COLOUR OF THE
DIFFUSER**
IDENTIFIES THE COLOUR
OF THE DIFFUSER
X CLEAR/FROSTED
Y OPAL
Z SMOKED

X


ELECTRIFICATION
IDENTIFIES THE TYPE OF
ELECTRIFICATION AND
THE EVENTUAL
PRESENCE OF BULBS

H1L

FUMAGALLI FACTORY



Assembly and Logistic department upgrade

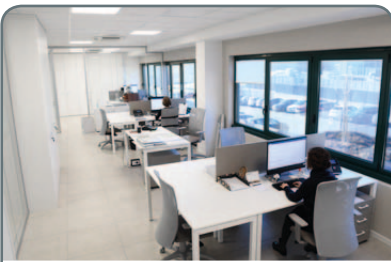

new offices



new exhibition area of 135 sqm



new automated Vertical Warehouse



new warehouse & factory



Fumagalli S.r.l.
Via Ca' Bassa, 29
21100 Varese - ITALY
Tel. +39.0332.336353
Fax. +39.0332.336358
E-mail italian.lux@fumagalli.it



www.fumagalli.it